


2 & 4 Door Central Locking Kits

Connect the black wire to chassis ground and red to a **fused** permanent +12V feed.
To connect the central locking kit to an alarm system follow one of the below diagrams.


CONNECTION TO FALCON PREDATOR ALARM (XL/EVO4/EVO4+)

Simply connect the alarms central locking wires to the white & brown lock/unlock wires on the central locking kit.

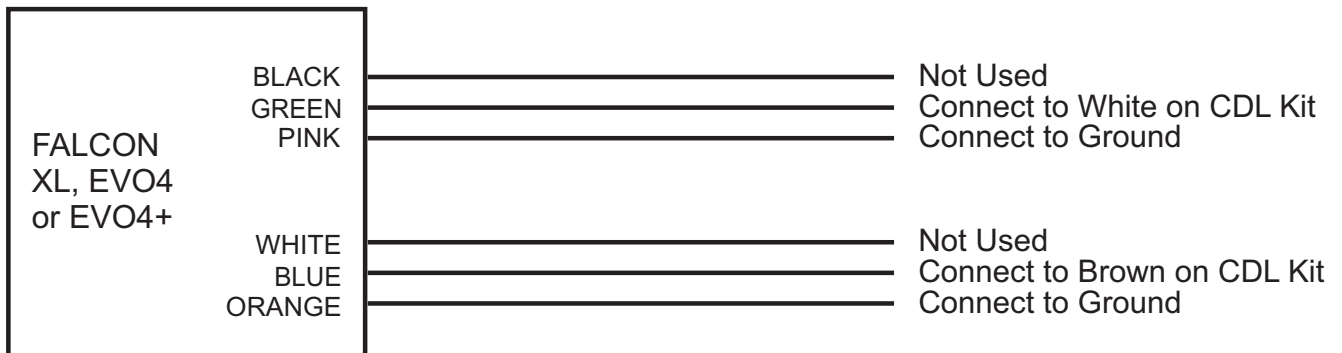

CONNECTION TO NONE FALCON ALARM

If the white wire on the central locking kit is grounded the doors will lock
If the brown wire on the central locking kit is grounded the doors will unlock
Identify which wires on your alarm correspond to lock/unlock in the below diagram and connect as below.

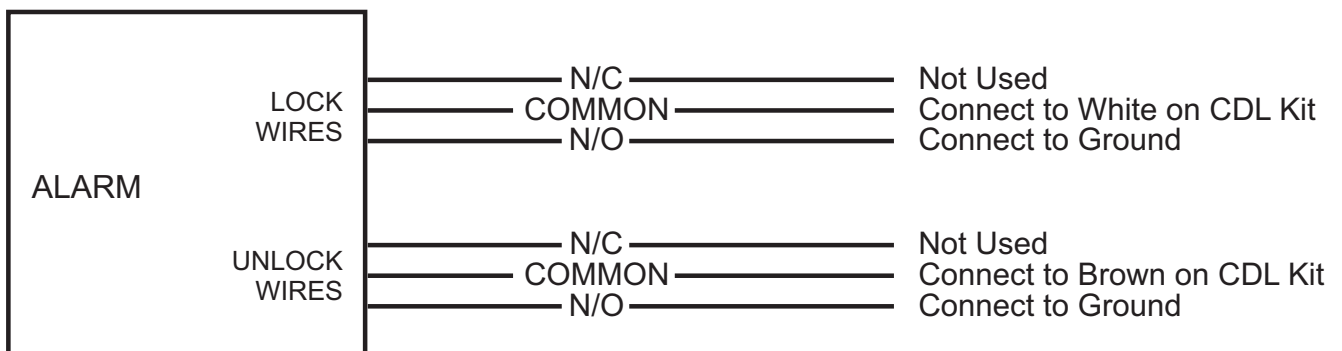

N/C = Normally Closed
N/O = Normally Open